

### Museo Configuration for Magellan AUX-Port

Museo Konfiguration für Magellan AUX-Port

Cable coiled/grey: **CAB-362 SH3924** (90G001092) (Gryphon i & QuickScan i)

Cable coiled/grey: **CAB-362 SH4132** (90G001095) (Gryphon i & QuickScan i)

Cable coiled/black: **CAB-461** (90A051993) (Powerscan 71xx)

#### USA Factory Configuration (Default)



\$P,AE,P

### INTERFACE

#### RS232-STD (9600-8-N-1, RTS)



\$P,HA05,P

#### Global Suffix = Disable



\$P,CLFSU0000,P

### DATA EDITING

#### Label ID Transmission = Enable as Prefix



\$P,CIDC001,P

#### Set **DataBar Expanded** Label ID Characters = R4



\$P,CXBI D5234,P

#### Set **DataBar Limited** Label ID Characters = R4



\$P,CLBI D5234,P

**DataBar Omnidirectional Label ID Characters are already R4!**  
DataBar Omnidirectional Label ID Charakters sind schon R4!

## SYMBOLOGIES

The symbologies must be also activated on the Magellan!  
 Die Symbologien müssen auch am Magellan aktiviert sein!

**DataBar Expanded = Enable**



**DataBar Omnidirectional = Enable**



**DataBar Limited = Enable**



**Code 39 Start/Stop Character Transmission = Enable**



**UCC-EAN 128 = Transmit in EAN 128 data format**



**Interleaved 2 of 5 = Enable**



**Codabar = Enable**



**Codabar Check Character Set = ABCD/ABCD**



## BEEPER INDICATOR OPTIONALLY / OPTIONAL

Good Read Beep Volume = **OFF**




\$P, CBPV000, P

Good Read Beep Volume = **LOW**




\$P, CBPV001, P

Good Read Beep Volume = **MEDIUM**

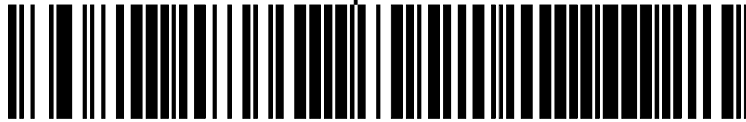

\$P, CBPV002, P


Good Read Beep Volume = **HIGH** (Default)

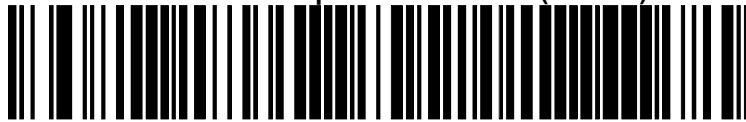

\$P, CBPV003, P

## MAGELLAN

AUXILIARY PORT = EXTERNAL HANDHELD INPUT

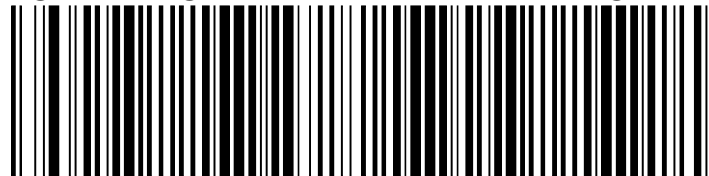

3 0 0 0 0 0 0 0 5 0 9 0 1 0 0 0 0 0