

## Museo Configuration for Magellan AUX-Port

Museo Konfiguration für Magellan AUX-Port

Cable straight/grey: **CAB-362 SH3924** (90G001092) (Gryphon i & QuickScan i)

Cable coiled/black: **CAB-461** (90A051993) (Powerscan 71xx)

### Standard Product Default Setting



\$P,HA00,P

## INTERFACE

### RS232-STD (9600-8-N-1, RTS)



\$P,HA05,P

### Global Suffix = Disable



\$P,CLFSU0000,P

## DATA EDITING

### Label ID Transmission = Enable as Prefix



\$P,CIDC001,P

### Set **DataBar Expanded** Label ID Characters = R4



\$P,CXBI D5234,P

### Set **DataBar Limited** Label ID Characters = R4



\$P,CLBI D5234,P

**DataBar Omnidirectional Label ID Characters are already R4!**  
DataBar Omnidirectional Label ID Charakters sind schon R4!


## SYMBOLOGIES

The symbologies must be also activated on the Magellan!  
Die Symbologien müssen auch am Magellan aktiviert sein!

### DataBar Expanded = Enable



### DataBar Omnidirectional = Enable

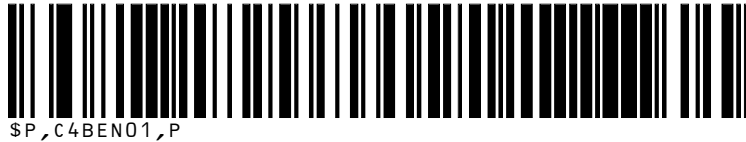

### DataBar Limited = Enable



### Code 39 Start/Stop Character Transmission = Enable



### UCC-EAN 128 = Transmit in EAN 128 data format



### Interleaved 2 of 5 = Enable



## BEEPER INDICATOR

OPTIONALLY / OPTIONAL


### Good Read Beep Volume = OFF



### Good Read Beep Volume = LOW




Good Read Beep Volume = **MEDIUM**

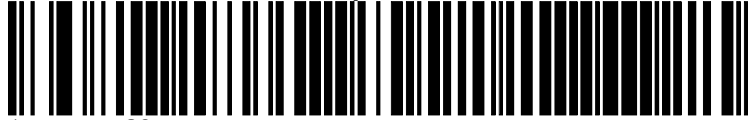

\$P, CBPV002, P

Good Read Beep Volume = **HIGH** (Default)

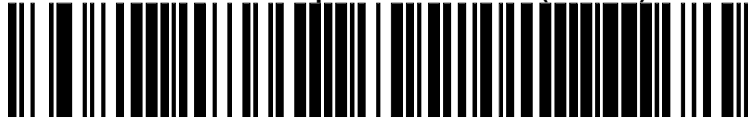

\$P, CBPV003, P

## MAGELLAN

2xxx / 8xxx Handheld Port Enable

