

Symbol 2208 Setup

150%

Return to Factory Defaults




SET DEFAULTS

RS-232 Host Types(continued) 6-7



OPOS/JPOS


USB DEVICE Type(continued) 7-5

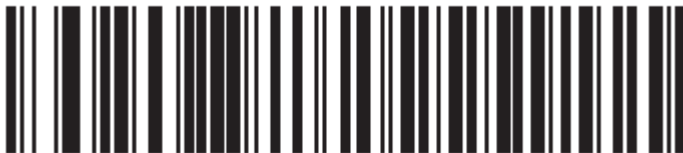

USB OPOS Hand-Held



Simple COM Port Emulation

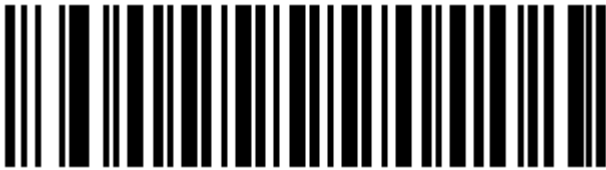

***Enable UPC-A**



***Enable UPC-E**



Enable UPC-E1



***Enable EAN-13**



***Enable EAN-8**

Convert **UPC/EAN/JAN Supplementals** Page: 12-10



Decode UPC/EAN/JAN Only With Supplementals

Convert **UPC-A/UPC-E/UPC-E1 Check Dight** Page: 12-13



Do Not Transmit UPC-A Check Digit



Do Not Transmit UPC-E Check Digit



Do Not Transmit UPC-E1 Check Digit

Convert **UPC-E to UPC-A** Page: 12-17

(콜라 바코드)



**Convert UPC-E to UPC-A
(Enable)**

Convert **UPC-E1 to UPC-A** Page: 12-18



**Convert UPC-E1 to UPC-A
(Enable)**

EAN-8/JAN-8 Extend Page: 12-18



**Convert UPC-E1 to UPC-A
(Enable)**

Enabled Code 128 Page: 12-22



***Enable Code 128**



***Enable UCC/EAN-128**

Enabled Code 39 Page: 12-24



***Enable Code 39**

Enabled Interleaved 2 of 5 Page: 12-38



***Enable Interleaved 2 of 5**